

Medium-speed commercial marine gas engines

B36:45V PROPULSION ENGINE

The Bergen B-series is based on a modular design, which gives a flexible platform and at the same time carries forward the Bergen traditional values as a robust and reliable engine.

Proven quality

The selection of technology was done after consulting a broad range of operators, designers and shipbuilders, to establish the qualities they prize in an engine. This engine series was first introduced to the market in 2014 as a diesel engine, and the gas version followed in 2018. It is available in several in-line or Vee cylinder variants for both diesel and gas, and is equally suitable for mechanical transmission or as a marine generating set.

Main benefits for shipyards

- Easy installation
- Aligned piping at pump-end for easy connection
- New resilient mounting (no need of welding brackets)
- Competitive fuel and lubricating oil consumption

Main Benefits for ship owners

- IMO Tier III compliant without SCR
- Single fuel = single bunkering
- No lubricating oil separator needed
- Fast load response
- Cleaner engine room and no smoke emission
- Extremely low methane slip at all engine loads
- Cylinder Pressure Monitoring (CPM) for improved load control, and possibility for diagnostics per cylinder
- Exceptionally low emissions of NOx, CO₂, SOx and particulate
- No “switch over” problems - ref ECA or port regulations
- Long-term compliance with local port regulations and potential benefits from taxation/green port dues
- VVT for optimum response and load increase
- Gas safe (double wall piping)
- Possible conversion from gas to diesel and vice versa
- Wastegate turbocharger to ensure optimised fuel/air ratio at varying ambient conditions for lean-burn operation


Technical data

Engine type		B36:45V12P	B36:45V16P
Number of cylinders		12	16
Engine speed	r/min	750	750
Mean piston speed	m/s	11.2	11.2
Max.cont rating (MCR)	kW	7200	9600
Mean effective pressure (BMEP)	bar	21	21
Specific energy consumption	kJ/kWh	7420	7420
Specific lubricating oil consumption	g/kWh	0.4	0.4
Cooling water temp. engine outlet	°C	90	90

The performance data is based on: Marine gas engine ratings are according to ISO 3046-1, at maximum 45°C ambient air temperature and maximum 32°C sea water temperature. Specific fuel gas consumption given at 100% load and no engine driven pumps, running on natural gas with Methane number above 70 and net calorific value of 36 MJ/nm³. To include 3 engine driven pumps, add 1.3%. Gas feed temperature is 20-40°C. Minimum gas feed pressure to Gas Regulating Unit to be 5,5 barg.

Waste heat recovery: Necessary data for arranging waste heat recovery plants (exhaust gas and cooling water) are available upon request..

Note: Due to continuous development, some data may be changed without notice.

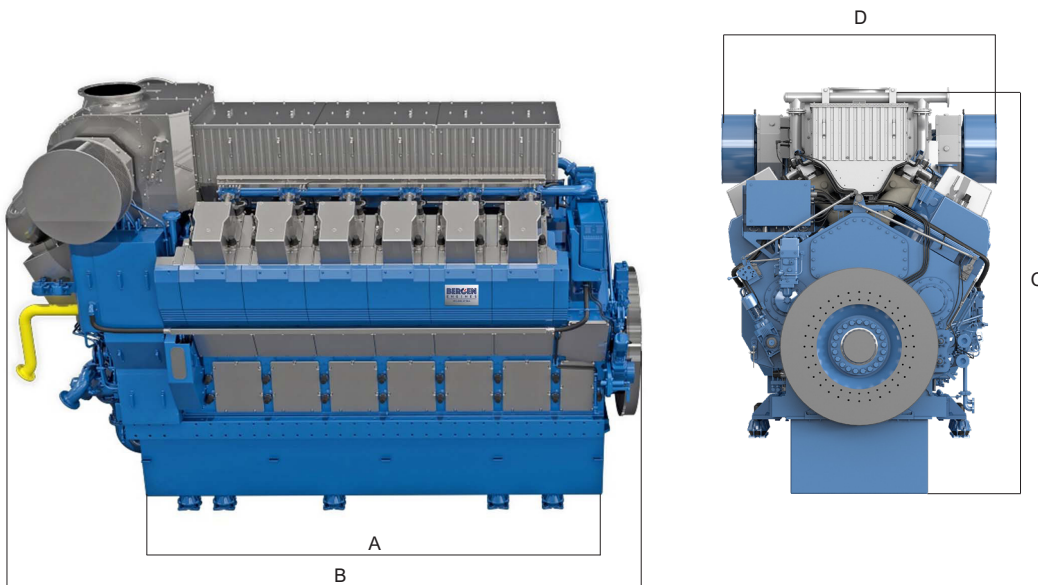

Principal dimensions

Cylinder dia. 360 mm. Piston stroke 450 mm. All dimensions in mm.

ENGINE TYPE	A	B	C	D	WEIGHT DRY ENGINE
B36:45V12P	5290	6900	4540	3140	74400 kg
B36:45V16P	6570	8400	5010	3660	99700 kg

Weight dry engine excludes transport foundation.